TOSIBOX®

Lock 150
Quick Start Guide

PATENTED CONNECTION METHOD

1 Matching the Lock with the Key

TOSIBOX® Lock
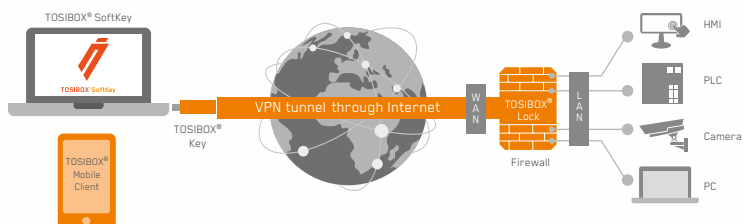
AC Adapter

TOSIBOX® Key

1. Connect the AC adapter to the Lock and wait for 2 minutes.

2. Insert the Key into the USB port of the Lock. When the LED on the Key stops blinking, (after approx. 10 seconds) the matching is complete and you can remove the Key from the USB port.

3. Go to 2a if deploying into broadband networks (ethernet) or 2b if deploying into mobile networks.

2a Deploying into Broadband Networks

TOSIBOX® SoftKey

TOSIBOX® SoftKey

VPN tunnel through Internet

TOSIBOX® Key

TOSIBOX® Mobile Client

WAN

TOSIBOX® Lock

LAN

Firewall

HMI

PLC

Camera

PC

1. Connect an Internet-connected ethernet cable to the Lock's WAN port.

2. Plug the devices into the Lock's LAN ports (LAN 1-3 or connect wirelessly via WLAN). If the devices have static IP addresses, please see *Deploying the Lock* in the TOSIBOX® user manual.

WAN

Internet /xDSL router

2b Deploying into Mobile Networks

1. Connect a computer to the Lock's service port with an ethernet cable

2. Type http://172.17.17.17 into your browser's address field to access the Lock's user interface. Log in using "*admin*" account. The password can be found on the bottom of the Lock. Select *Network → USB modem* and either use the Automatic APN setting or fill in the APN according to your mobile operator settings. Enter PIN code if necessary. Click *Save*.

3. Plug a supported USB modem into the USB port of the Lock.

4. Plug network devices into the Lock's LAN ports (LAN 1-3) or connect wirelessly via WLAN. See *Deploying the Lock* in the user manual for static IP configurations.

5. Verify on the status page of the Lock user interface that Internet connection is OK.

For more information and latest supported modem models, visit www.tosibox.com/support

3 Using the Key

Insert a TOSIBOX® Key into the USB port of your computer to install the Key software.

The TOSIBOX® Key user interface illustrated above shows all Lock devices serialized to the Key and the network devices connected to them.
For more options click ⚙ or ➡ icon.

🟩 The Lock is connected to the Internet and the Key is connected to the Lock.

🟨 The Lock is connected to the Internet, but the Key isn't connected to the Lock.

🟥 The Lock is not connected to the Internet.

CE **Declaration of Conformity**

Hereby, Tosibox Oy declares that the radio equipment type Lock 150 is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at https://www.tosibox.com/lock-150-eu-doc/

Patented, incl. US8831020, US9900178. Patents pending, incl. US14/119753, US14/39015

Download
user manual

www.tosibox.com/
Lock_Key_Manual_en.pdf

Visit
Support

www.tosibox.com/support/

Download
TOSIBOX® Mobile Client

www.tosibox.com/product/
mobile-client/