



Tie socket self-adhesive



Benefits

- Option for cross-mounting / double-mounting on the crossover points of the cable harness
- Easy to handle

Application range

- The cable ties are slotted through the eyelets for fixing cables or other items to the wall
- Wiring of switch cabinets, motor vehicles and office machines, etc.

Norm references / Approvals

- Self-extinguishing in accordance with UL 94 V-2 (without adhesive tape)

Note

- Walls must be smooth and grease-free
- Minimum adhesive application time: 10 sec, recommended adhesive curing time: 24 h

Technical data

	Classification ETIM 5/6 ETIM 5.0/6.0 Class-ID: EC000449 ETIM 5.0/6.0 Class-Description: Mounting base and -element for cable ties
	Colour delivered Black Natural colour
	Material Polyamide 6.6 Halogen-free and silicone-free
	Temperature range -15 °C to +50 °C Minimum working temperature: +10 °C

Article number	Article description	Colour	Diameter (mm)	Tie width (mm)	Length x width (mm)	Pieces / PU
Tie socket self-adhesive						
61718612	Adhesive socket 19 x 19 NA	natural	3.2	3.6	19.0 x 19.0	100
61718611	Adhesive socket 19 x 19 BK	black	3.2	3.6	19.0 x 19.0	100
61718614	Adhesive socket 28 x 28 NA	natural	5.2	5.3	28.0 x 28.0	100
61718613	Adhesive socket 28 x 28 BK	black	5.2	5.3	28.0 x 28.0	100


Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Similar products

- Mounting socket with saddle refer to page 1050
- Tie screw socket refer to page 1051
- Tie small socket refer to page 1051



Mounting socket with saddle

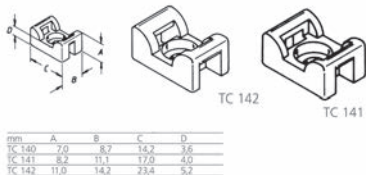

Benefits

- Compact construction ensures high stability
- Prism-shaped saddle of this mounting socket enables torsion-safe fastening and bundling of cables

Application range

- Fastening elements for cable ties
- For fastening with screws or rivets
- Typical areas of application: Process control systems, control cabinet manufacturing and mechanical engineering

Norm references / Approvals

- UL 94 V-2

Included

- Without screws, rivets, etc.

Technical data

	Classification ETIM 5/6 ETIM 5.0/6.0 Class-ID: EC000449 ETIM 5.0/6.0 Class-Description: Mounting base and -element for cable ties
	Colour delivered White
	Material Polyamide 6.6 Halogen-free and silicone-free
	Temperature range -40 °C to +85 °C

Article number	Article description	Fastening type	Material	Diameter (mm)	Tie width (mm)	Weight (g/100 pieces)	Pieces / PU
Mounting socket with saddle							
61724920	TC 140	screwing	PA 6.6	2.8	2.4	47	500
61724510	TC 141	screwing	PA 6.6	3.5	4.8	77	500
61724910	TC 142	screwing	PA 6.6	5.2	7.6	120	500

This is a product of the company ABB/Thomas & Betts.
Photographs and graphics are not to scale and do not represent detailed images of the respective products.