


## Data sheet

Commercial Art.No.: R1.574.1500.0

light curtain SLC-4PR40-1500

Safety-Lightcurtain Type 4, Receiver-Professional, Resolution 40 mm, L = 1500 mm

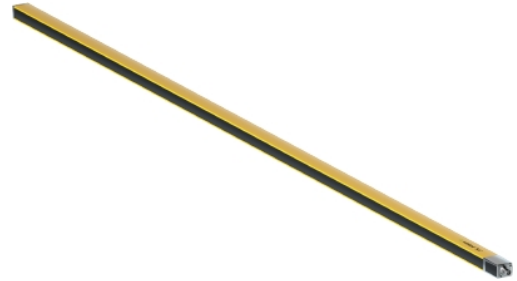

Commercial Art.No.	R1.574.1500.0
EAN	4049088398261
Order Unit	1

certificates / approvals



## Technical data

### function

sensor element	
with muting function	yes
with muting display	no
with beam coding	yes
automatic start	yes
restart interlock	yes
alignment aid	yes
blinking	yes
cascadable	no

### technical data

type acc. EN 61496-1	4
resolution	40 mm
protective field height	1500 mm
distance	0 - 20 m
connection	connector M12
nominal voltage	24 V
voltage type	DC
number of OSSD outputs	2
max. output current	380 mA
degree of protection (IP)	IP65
PFH <sub>d</sub> (High demand mode)	7.73 E-9 1/h
mission time TM	20 a

### safety parameters

category (ISO 13849-1)	4
PL (ISO 13849-1)	level e
SIL <sub>CL</sub> (IEC 62061)	3

PFH <sub>d</sub> (High demand mode)	7.73 E-9 1/h
HFT	1
T <sub>M</sub>	20 a

#### dimensions

width sensor	29 mm
height of sensor	35.4 mm
length of sensor	1566 mm

#### classification

ECLASS 11	
ECLASS 8.1	27270910
ETIM 9.0	EC002549
ETIM 8.0	EC002549
ETIM 7.0	EC002549
ETIM 6.0	EC002549
ETIM 5.0	EC002549
ETIM 4.0	EC002549
ETIM 3.0	EC002549

#### product compliance

ROHS conformity status	compliant
REACH-SVHC conformity status	compliant

## Accessories

Commercial Art.No.:	Article-type description:	Description:
R1.596.0010.0	cable SLX-SBOX-CAB2	Cable, M12, female connector straight, male connector straight, 5 m
R1.596.0011.0	cable SLX-SBOX-CAB2W	Cable, M12, female connector straight, male connector angulated, 5 m
R1.596.0012.0	cable SLX-SBOX-CAB3	Cable, M12, female connector straight, male connector straight, 15 m
R1.596.0013.0	cable SLX-SBOX-CAB3W	Cable, M12, female connector straight, male connector angulated, 15 m
R1.594.1600.0	tilted mirror tie bar SLX-COLM-1600	Reflector column, persistant 1600 mm
R1.595.1500.0	tilted mirror SLX-MIR-1500	Reflector, length: 1560 mm
R1.596.0005.0	receipt-unit SLX-SBOX SLX-ACC-CONF1	Reset-Box for SLX-SBOX, M12
R1.596.0007.0	sensor interface muting sensors SLX-SBOX-MO	Sensor interface for muting sensors on safety light curtains SLC-4 Professional, with mounting plate
R1.596.1430.0	test bar SLX-ACC-TEST1430	Test bar, 14/30 mm
R1.596.2040.0	test bar SLX-ACC-TEST2040	Test bar, 20/40 mm
R1.500.0805.0	connection cable SLX-CAB-M12-0805	Connection cable M12, 8-pole, Length 5m, unshielded
R1.500.0810.0	connection cable SLX-CAB-M12-0810	Connection cable M12, 8-pole, Length 10m, unshielded
R1.500.0815.0	connection cable SLX-CAB-M12-0815	Connection cable M12, 8-pole, Length 15m, unshielded
R1.500.0825.0	connection cable SLX-CAB-M12-0825	Connection cable M12, 8-pole, Length 25m, unshielded
R1.500.0850.0	connection cable SLX-CAB-M12-0850	Connection cable M12, 8-pole, Length 50m, unshielded
R1.600.0805.0	connection cable SLX-CAB-M12-S0805	Connection cable M12, 8-pole, Length 5m, shielded
R1.600.0810.0	connection cable SLX-CAB-M12-S0810	Connection cable M12, 8-pole, Length 10m, shielded
R1.600.0815.0	connection cable SLX-CAB-M12-S0815	Connection cable M12, 8-pole, Length 15m, shielded
R1.600.0825.0	connection cable SLX-CAB-M12-S0825	Connection cable M12, 8-pole, Length 25m, shielded
R1.600.0850.0	connection cable SLX-CAB-M12-S0850	Connection cable M12, 8-pole, Length 50m, shielded

R1.593.1600.0	device columns SLX-COL-1600	"Device column, profile heighth: 1580 mm; Total heighth: 1660 mm"
R1.591.0001.0	sliding block set SLX-MO-TNUTM6	Set Slot nut with M6-screw thread, 10 pcs.
R1.591.0005.0	Z-fixture SLX-MO-Z	Z-Bracket, 2 pcs.
R1.591.0007.0	rotary holding with shockabsorber SLX-MO-RO-S	Rotative bracket with Shockabsorber, 70mm lang, 2 pcs.
R1.591.0009.0	tool holder SLX-MO-CLIP	Clamp bracket, for Installation in Device column
R1.591.0010.0	set tool holder SLX-MO-CLIP2	Set Clamp bracket, for Installation in Device column
R1.591.0020.0	rotary holding 360° SLX-MO-RO2	Rotative bracket, 2 pcs., incl. 1 pcs. SLC-cylinder
R1.596.0008.0	cable SLX-SBOX-CAB1	Cable, M12, female connector straight, male connector straight, 1,5 m
R1.596.0009.0	cable SLX-SBOX-CAB1W	Cable, M12, female connector straight, male connector angulated, 1,5 m

### Fits with

Commercial Art.No.:	Article-type description:	Description:
R1.544.1500.0	light curtain SLC-4TR40-1500	Safety-Lightcurtain Type 4, Transmitter, Resolution 40 mm, L = 1500 mm

