


22260837	DATA SHEET	
Valid from: 25.01.2024	AB-C4-M12MS-(L*)PVC-M12FA	

Product description

- Sensor/actuator cable, 4-pol, PVC black
- Straight M12-plug on angled M12-jack



General characteristics

Number of pins	4
Ambient temperature	-25 °C to +90 °C (-13°F to 194°F) (plug / jack) -25 °C to +80 °C (-13°F to 176°F) (cable, fixed installation) -10 °C to +80 °C (14°F to 176°F) (cable, movable installation)
Degree of protection	IP65 / IP67 / IP68
Coding	A-standard
Tightening torque	0,4 Nm (M12-connector)
Plugging cycles	≥ 100

Variation

Article number	Description	Length [m]	Configuration
22260837	AB-C4-M12MS-1,0PVC-M12FA	1	straight - angled
22260832	AB-C4-M12MS-2,0PVC-M12FA	2	straight - angled
22260830	AB-C4-M12MS-3,0PVC-M12FA	3	straight - angled
22260831	AB-C4-M12MS-4,0PVC-M12FA	4	straight - angled
22260705	AB-C4-M12MS-5,0PVC-M12FA	5	straight - angled
22260835	AB-C4-M12MS-6,0PVC-M12FA	6	straight - angled
22260707	AB-C4-M12MS-7,0PVC-M12FA	7	straight - angled
22260834	AB-C4-M12MS-8,0PVC-M12FA	8	straight - angled
22260708	AB-C4-M12MS-9,0PVC-M12FA	9	straight - angled
22260833	AB-C4-M12MS-10,0PVC-M12FA	10	straight - angled
22262204	AB-C4-M12MS-15,0PVC-M12FA	15	straight - angled
22262205	AB-C4-M12MS-20,0PVC-M12FA	20	straight - angled


Additional note

Data sheet also valid for variant lengths. Other lengths on request.

Electrical properties

Rated voltage	250 V
Rated current	4 A
Overvoltage category	II
Pollution degree	3

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260837EN Version: 06	Page 1 of 3
---	---------------------------------------	-------------

22260837	DATA SHEET	
Valid from: 25.01.2024	AB-C4-M12MS-(L*)PVC-M12FA	

Mechanical properties

Plug, jack

Inflammability class in accordance with UL 94	HB
Contact, material	CuSn
Contact carrier, material	TPU GF
Contact surface, material	Ni/Au
Knurl, material	Zinc diecasting, nickel-plated
Handle, material	TPU, flame retardant, self-extinguishing
Seal, material	NBR


Line

Cable construction	4 x AWG22/42
Signal line, construction	42 x 0,1 mm
Conductor cross-section	0,34 mm ²
Conductor diameter including isolation	1,26 mm ± 0,05 mm
Cable outer diameter D	5,2 mm ± 0,15mm
Insulation color	brown, white, blue, black
Sheath color	black, RAL 9005
Minimum bending radius, fixed	5 x D
Minimum bending radius, movable installation	10 x D
Cable weight	40 kg/km
Outer coating, material	PVC
Wire insulation, material	PVC
Insulation resistance	≥ 200 GΩ*km (at 20 °C)
Conductor resistance	Max. 57 Ω/km (at 20 °C)
Flame resistance	acc. to UL-Style 2464
Oil resistance	acc. to DIN EN 60811-2-1, 168 h bei 90 °C

Standards


Product standard, M12 connector	IEC 61076-2-101
UL-Listed, E-File	E249137

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260837EN Version: 06	Page 2 of 3
---	---------------------------------------	-------------

22260837	DATA SHEET	
Valid from: 25.01.2024	AB-C4-M12MS-(L*)PVC-M12FA	


Technical drawing

Dimensional drawing

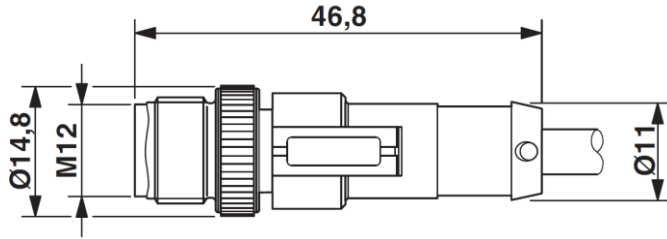


Plug M12 x 1, straight

Dimensional drawing

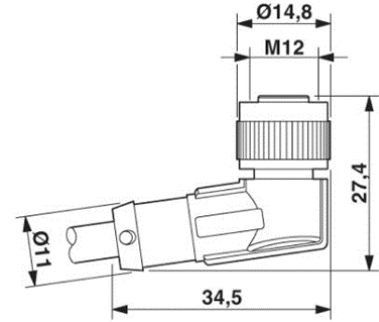


Jack M12 x 1, angled

Drawing




Pin assignment M12-plug, 4-pol, A-coding

Drawing




Pin assignment M12-jack, 4-pol, A-coding

Circuit diagram

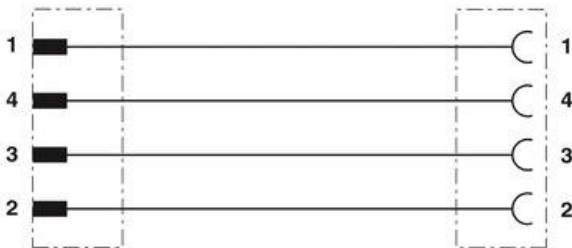

Pin assignment between M12-plug and M12-jack

Wire cross section



Application range

For medium mechanical load in the dry area

Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Creator: THLE3/PDP Released: IVSE1/PDP	Document: DB22260837EN Version: 06	Page 3 of 3
---	---------------------------------------	-------------