





**EPIC® H-B 24 SGR-LB**

Housing design H-B. The industry standard.

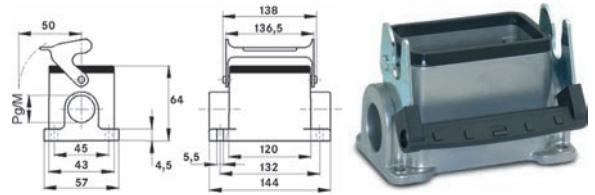

**EPIC® H-B 24 SGRL-LB**

Housing design H-B. The industry standard.

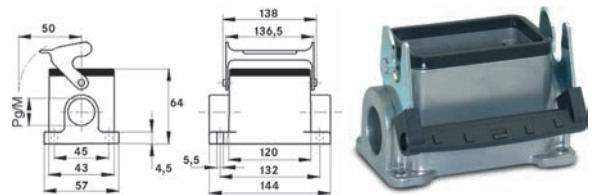

**Info**

- Single Lever version for quick locking and simple unlocking with lifting aid

**Info**

- For easy introduction of two cables
- Single Lever version for quick locking and simple unlocking with lifting aid

**Benefits**

- Safe fixing with 4 screws
- Casted neck for easy assembly of the cable gland

**Application range**

- Plant engineering
- Light & sound technology
- Plastics industry

**Product features**

**EPIC® H-B 24 SGR-LB**

- Surface-mount base, low version
- Single lever
- 1 cable entry

**EPIC® H-B 24 SGRL-LB**

- Surface-mount base, low version
- Single lever
- 2 cable entries

**Suitable inserts**

- Refer to Selection Table A 10 to select the required inserts and housings

**Technical data**

**ETIM** ETIM 5.0 Class-ID: EC000437  
ETIM 5.0 Class-Description: Housing for industrial connectors

**Material**  
Housing: powder-coated aluminium alloy, grey  
Lever: zinc-plated steel  
Sealing: NBR

**IP** Protection rating  
IP 65 (latched)

**DIN VDE** Certified production control:  
VDE-REG. no.: B437  
UL-tested:  
UL File Number: E75770

**Temperature range**  
-40°C to +100°C,  
short-term up to +125°C

Article number	Article description	M	PG	Pieces / PU
<b>H-B housing: surface-mount base (1 cable entry, single lever)</b>				
10104900	H-B 24 SGR-LB 21		21	5
19104900	H-B 24 SGR-LB M25	25		5
<b>H-B housing: surface-mount base (2 cable entries, single lever)</b>				
10105900	H-B 24 SGRL-LB 21		21	5
19105900	H-B 24 SGRL-LB M25	25		5

Photographs are not to scale and do not represent detailed images of the respective products.

**Accessories**

- SKINTOP® MS-M
- SKINTOP® for industrial connectors
- Easy to install