



Data Sheet | Item Number: 221-420


Splicing connector with levers; for all conductor types; max. 4 mm²; 10-conductor;
transparent housing; Surrounding air temperature: max 85°C (T85); 4,00 mm²; trans-
parent

<https://www.wago.com/221-420>

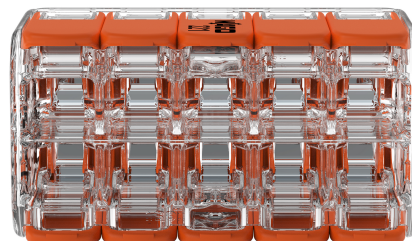

Color: ☐ transparent

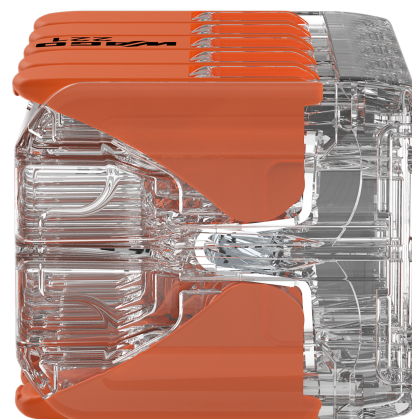



Dimensions in mm

Splicing connector with levers, 221 Series, lever

Error-free electrical installations are guaranteed with splicing connector with levers (item number 221-420). From intercom system wiring to electric ovens—connecting various conductor types is quick and easy with WAGO's practical 221 Series splicing connector. This splicing connector has a rated voltage of 450 V and can handle currents up to 32 A, making it ideal for high-load applications. Ensure that the strip lengths are 11 mm when connecting conductors to splicing connector with levers. This product features conductor terminals and utilizes CAGE CLAMP®. Our highly-rated and maintenance-free CAGE CLAMP® connection makes it easy to connect all conductor types without having to prepare the conductor. For example, you don't need to crimp ferrules. The dimensions are 29.8 x 15.8 x 18.3 mm (width x height x depth). Splicing connector with levers is suitable for conductor cross sections ranging from 0.2 mm² to 4 mm².

WAGO's 221 Series Splicing Connector with levers impresses with its innovative design for different conductor cross-sections. That's why WAGO's lever-equipped splicing connector holds a unique trademark within electrical interconnection technology. The flat levers, which fit seamlessly into the 221's base, act like a cast when closed and can be positioned neatly in any housing without disturbing edges. Due to the wide design of each lever, they can all be operated perfectly without tools for convenient conductor terminations. The transparent housing displays robust technology and enables immediate visual inspection for the correct contact of solid, stranded and fine-stranded conductors. Resembling piano keys, the levers' design perfectly combines the functional and aesthetic connection technology "Made by WAGO." This product is designed for specific Ex applications (please refer to the product datasheet).



Notes	
General safety information	NOTICE: Observe installation and safety instructions! <ul style="list-style-type: none">• Only to be used by electricians!• Do not work under voltage/load!• Use only for proper use!• Observe national regulations/standards/guidelines!• Observe technical specifications for the products!• Observe the number of permissible potentials!• Do not use damaged/dirty components!• Observe conductor types, cross-sections and strip lengths!• Insert conductor until it hits the product's backstop!• Use original accessories! To be sold only with installation instructions!
Safety Information	in grounded power lines

Electrical data	
Ratings per IEC/EN	
Ratings per	EN 60664
Nominal voltage (II/2)	450 V
Rated impulse withstand voltage (II/2)	4 kV
Rated current	32 A
Legend (ratings)	(II / 2) ≙ Overvoltage category II / Pollution degree 2
Ratings per UL	
Approvals per	UL 486C
Rated voltage UL (Use Group C)	600 V
Rated current UL (Use Group C)	20 A

Connection data	
Clamping units	10
Total number of potentials	1
Connection 1	
Connection technology	CAGE CLAMP®
Actuation type	Lever
Connectable conductor materials	Copper
Nominal cross-section	4 mm² / 12 AWG
Solid conductor	0.2 ... 4 mm² / 24 ... 12 AWG
Stranded conductor	0.2 ... 4 mm² / 24 ... 12 AWG
Fine-stranded conductor	0.14 ... 4 mm² / 24 ... 12 AWG
Strip length	11 mm / 0.43 inches
Wiring direction	Side-entry wiring

Physical data	
Width	29.8 mm / 1.173 inches
Height	15.8 mm / 0.62 inches
Depth	18.3 mm / 0.72 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	transparent
Cover color	transparent
Material group	Illa
Insulation material (main housing)	Polycarbonate (PC)
Flammability class per UL94	V2
Fire load	0.132 MJ
Actuator color	orange
Weight	7 g







Environmental requirements	
Ambient temperature (operation)	+85 °C
Temperature marking per EN 60998	T85

Commercial data	
PU (SPU)	150 (15) pcs
Packaging type	Box
Country of origin	DE
GTIN	4066966611663
Customs tariff number	85369010000

Product Classification	
UNSPSC	39121409
ETIM 9.0	EC000446
ETIM 8.0	EC000446
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
  		
Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 60998	NTR NL-8062
cULus_Listed_667F Underwriters Laboratories Inc.	UL 486C	E69654
ENEC 05 DEKRA Certification B.V.	IEC 60998	71-152248
		EU-Declaration of Confor- mity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 221-420	



1 Compatible Products

1.1 Optional Accessories

1.1.1 Jumper

1.1.1.1 Jumper



Item No.: 221-941/000-006 Jumper; for conductor entry; 2-way; insulated; blue	Item No.: 221-942/000-006 Jumper; for conductor entry; 2-way; insulated; blue	Item No.: 221-941 Jumper; for conductor entry; 2-way; insulated; dark gray	Item No.: 221-942 Jumper; for conductor entry; 2-way; insulated; dark gray
---	---	--	--

1.1.2 Mounting adapter

1.1.2.1 Mounting accessories



Item No.: 221-539/000-006 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; blue	Item No.: 221-539/000-053 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; dark gray-yellow	Item No.: 221-549/000-006 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; blue	Item No.: 221-549/000-053 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; dark gray-yellow
--	--	--	--



Item No.: 221-509/000-006 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; blue	Item No.: 221-509/000-053 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; dark gray-yellow	Item No.: 221-509 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; white	Item No.: 221-519/000-006 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; blue
---	---	--	--



Item No.: 221-519/000-053 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; dark gray-yellow	Item No.: 221-529/000-006 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; blue	Item No.: 221-529/000-053 Mounting carrier with strain relief; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; dark gray-yellow	Item No.: 221-539/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; blue
--	---	---	---



Item No.: 221-539/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-15 rail; dark gray-yellow	Item No.: 221-549/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; blue	Item No.: 221-549/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for DIN-35 rail; dark gray-yellow	Item No.: 221-509/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; blue
---	---	---	--






Item No.: 221-509/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for screw mounting; dark gray-yellow	Item No.: 221-519/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; blue	Item No.: 221-519/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; for side screw mounting; dark gray-yellow	Item No.: 221-529/002-006 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; blue
--	---	---	--



Item No.: 221-529/002-053 Mounting carrier; for 10-wire connectors; 221 Series - 4 mm²; with snap-in mounting foot; dark gray-yellow
--

Installation Notes

Conductor termination





Strip conductor to 11 mm (0.43 inch).

Pull up an orange lever to open the clamping unit.

Then insert the conductor and push the lever back down, flush with the connector housing.

Compact, lever-operated splicing connectors:
Tool-free connection of fine-stranded conductors from 0.14 ... 4 mm², as well as solid or stranded conductors from 0.2 ... 4 mm² (24 ... 12 AWG).
Safety:
The lever's specially designed rest position reliably prevents accidental unclamping of a connected conductor.
Application safety, for any type of conductor (solid, stranded, fine-stranded), is confirmed by approvals like ENEC or UL.

Application



Wiring fine-stranded conductors in junction boxes.

Custom low-voltage lighting system

Lighting distribution in a ceiling canopy

Pendant light connection in a suspended ceiling